


innovate...lamine

Introducing the new Easymount™ range with heated top roller for superb results everytime



Reverse Feature

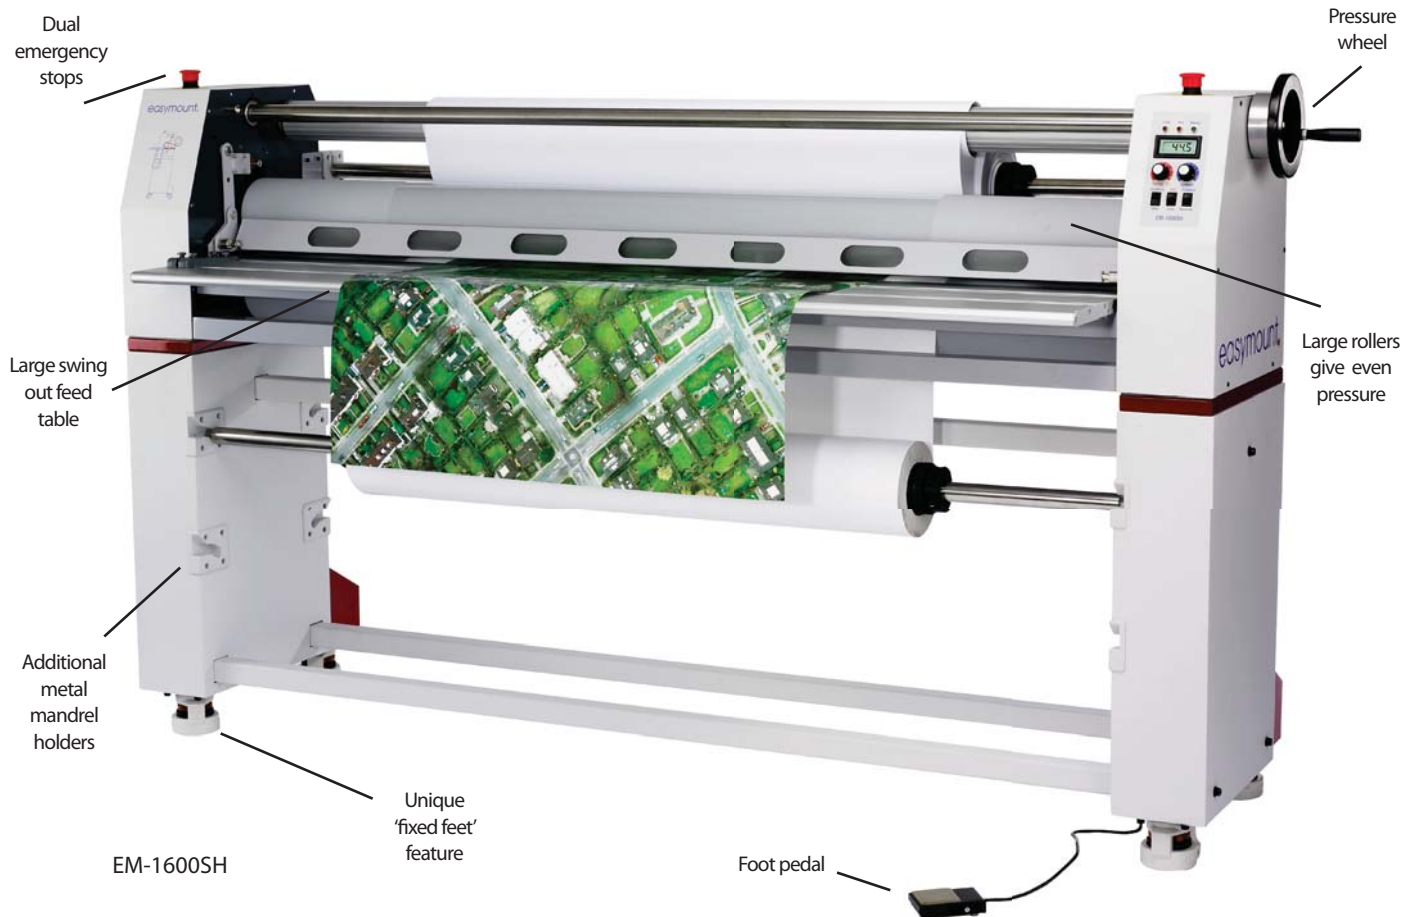

Speed Control



Temperature Control



## Design

The new Easymount™ combines style with functionality. The design has been enhanced and more features have been added. This professional range sets new standards of excellence.

## Performance

The three models in the range include 1200, 1400 and 1600mm widths, all of which are capable of producing up to 3 metres per minute - 50% faster than before!

## Enhancements

The range now features additional mandrel holders for storing spare rolls of film, a swing out feed tray for hassle free loading and a pressure gauge on the rollers to give perfect results every time.

### IDEALLY SUITED FOR

- cold laminates
- mounting prints to boards
- applying vinyls
- application tapes
- applying adhesive films

and many more...

### GREAT FOR USE IN

- commercial printers
- copy and print shops
- exhibition graphics
- reprographics bureau
- sign makers

# EASYMOUNT™ SH

EM-1200SH / EM-1400SH / EM-1600SH

## FEATURES

- hot & cold mounting and laminating
- solid construction heavy-duty system
- mount & laminate simultaneously
- single hot adjustable roller
- take up mandrel for release liner paper
- variable speed control
- large silicon rollers for even pressure
- reverse mechanism and foot pedal
- low maintenance
- magic eye safety feature



ROLLER PRESSURE GAUGE



USER FRIENDLY CONTROL PANEL



LARGE SWING OUT FEED TRAY



MOTORISED TAKE UP UNIT\*

## NEW IMPROVED FEATURES

- 50% faster - now up to 3m per minute
- extra mandrels to hold spare rolls of film which saves time when changing rolls
- adjustable castors for levelling on an uneven floor
- bigger feed tray to assist prints feeds
- swing out feed tray and safety guard making mounting onto board and loading the film quicker and hassle free
- pressure gauge on rollers, adjustable on machine to give perfect pressure every time

\* This is an optional extra



EM-1600SH

## specifications

	EM-1200SH	EM-1400SH	EM-1600SH
approx laminating speed (m/min)	3	3	3
maximum width (mm)	1200 (47")	1400 (55")	1600 (62")
mounting thickness (mm)	25	25	25
roller diameter (mm)	110	120	130
warm-up time (mins)	10	10	10
hot roller heater system	internal infrared	internal infrared	internal infrared
laminating temperature (°C)	0-60	0-60	0-60
speed/temp control	dial keypad	dial keypad	dial keypad
pressure adjustment	manual (with guide)	manual (with guide)	manual (with guide)
film core (mm)	75	75	75
power supply AC (V-Hz)	220/240-50-60	220/240-50-60	220/240-50-60
power consumption (W)	970	1310	1500
dimensions (mm)	1790 x 648 x 1248	1990 x 648 x 1248	2190 x 648 x 1257
weight (Kg)	178	189	217
warranty (year)	1	1	1



GRAPHIC PRINTING  
TECHNOLOGIES LTD  
01753 727128  
www.g-p-t.co.uk

E&O.E