

With full independent control over pressure and speed, the SEAL 62 S and 62 C are ideal for both new and experienced image finishers who require a highly capable laminator but have no need for hot encapsulation. The 62 S and 62 C are based on the widely acclaimed 62 Pro and feature the same high pressure nip system. This delivers superb results whatever the application required.

The SEAL 62 S and 62 C are perfect for mounting and laminating up to 1575mm. The SEAL 62 C is a cold machine. The Seal 62 S variant includes a heated top roller for enhanced lamination (up to 140°C). Both machines are ideal for medium to large volume environments where control and productivity are key requirements.

The SEAL 62 S and 62 C have four material stations. The bottom stations have combi-shafts (unwind or rewind). This provides maximum flexibility and allows for the use of a wider range of SEAL consumables. The two rear stations are of a swing-out design which facilitates easy loading and reduces the space required to site the machine. Both models feature a simple swing up feed table which incorporates the image in-feed guide as seen on the ever popular 62 Plus. The SEAL 62 S and 62 C are engineered to accept the new Easy Feed table from the 62 Pro, which is available as an optional upgrade.

The SEAL 62 S and 62 C are ideal for producing a wide variety of applications:



Rigid Indoor Displays

Floor Graphics

Backlit Displays

Pop-Up Displays

Roll-Up Displays

Rigid Outdoor Displays

The SEAL 62 S and 62 C provide the following features:

Optimum performance

- Based on the existing 62 Pro platform giving proven performance
- Adjustable pressure and speed settings for maximum versatility
- 2.5 N/mm line pressure for superior cold lamination
- 40 mm nip opening to cover a wide range of substrates
- 1575 working width to cope with a wide range of media
- 2 combi shafts (bottom) to maximize processable applications
- Variable roller technology for better processing of soft substrates
- Maximum speed of 6m/min for increased production capacity
- Manual nip adjustment for precise operation

Ease of use

- Ergonomic control panel for ease of use
- Swing out supply shafts for easy loading
- Auto grip supply shafts for user friendly material loading
- Auto grip re-wind shafts for more effective take up of release liners
- Outboard brakes for greater control of material unwind
- Optional new in-feed table for increased ease of use and flexibility

Safety

- Foot switch for hands free operation
- Self checking safety eyes for increased operator safety
- C.E. certified

SEAL 62 S and 62 C


SPECIFICATIONS



Swing out supply shafts for easy loading.



Ergonomic control panel for ease of use.

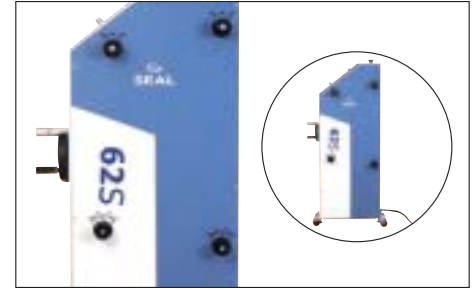

Outboard brakes for greater control of material unwind.

Technical Specifications - SEAL 62 S and 62 C

Maximum Working Width	Up to 50°C: 1575 mm (62") Up to 125°C: 1524 mm (60")	
Maximum Speed	6m/min. (20 ft/min.)	
Maximum Substrate Thickness	38 mm (1.5")	
Maximum Roller Temperature 62 S	140°C (284 °F)	
Roller Heating 62 S	Single heated	
Dimensions	Width: 2232 mm (87.9") Height: 1407 mm (55.4") Depth (including feed table): 666 mm (26.2") Depth (including feed table and trough): 920 mm (36.2") Working Height: 890 mm (35.0")	
Net Weight	488 Kg (1076 lbs)	
Shipping Dimensions	Width: 2280 mm (89.8") Height: 1675 mm (64.8") Depth: 900 mm (35.4")	
Shipping Weight	540 kg (1090 lbs)	
Electrical Requirements	SEAL 62 C SEAL 62 S	1N/PE 230VAC +/- 10% 50/60Hz, 2A 1N/PE 230VAC +/- 10% 50/60Hz, 16A
Order Codes	SEAL 62 C SEAL 62 S	64293 64294

SEAL® Brands is a registered trademark of SEAL Graphics



SEAL Graphics Europe BV
Kanaaldijk O.Z. 3
P.O. Box 29,
8100 AA Raalte
The Netherlands
Tel: + 31 (0) 572 345 500
Fax: + 31 (0) 572 345 501

SEAL Graphics UK Ltd
1 Watkins Close,
Burnt Mills Industrial Estate
Basildon,
Essex SS13 1TL
United Kingdom
Tel: + 44 (0) 1268 722 400
Fax: + 44 (0)1268 725 864

SEAL Graphics Pacific Limited
Unit A, 13th Floor, Block 1
Leader Industrial Centre
Tsuen Wan, New Territories,
Hong Kong
Tel: + 852 2407 3738
Fax: + 852 2408 0973

SEAL Graphics Americas
7091 Troy Hill Drive
Elkridge
MD 21075
U.S.A.
Tel: + 001 410 379 5400
Fax: + 001 410 579 8960

Contact your local distributor:

CE

508308/UK
4/04